


COLUMNS

Vertical spacing of Lateral Ties

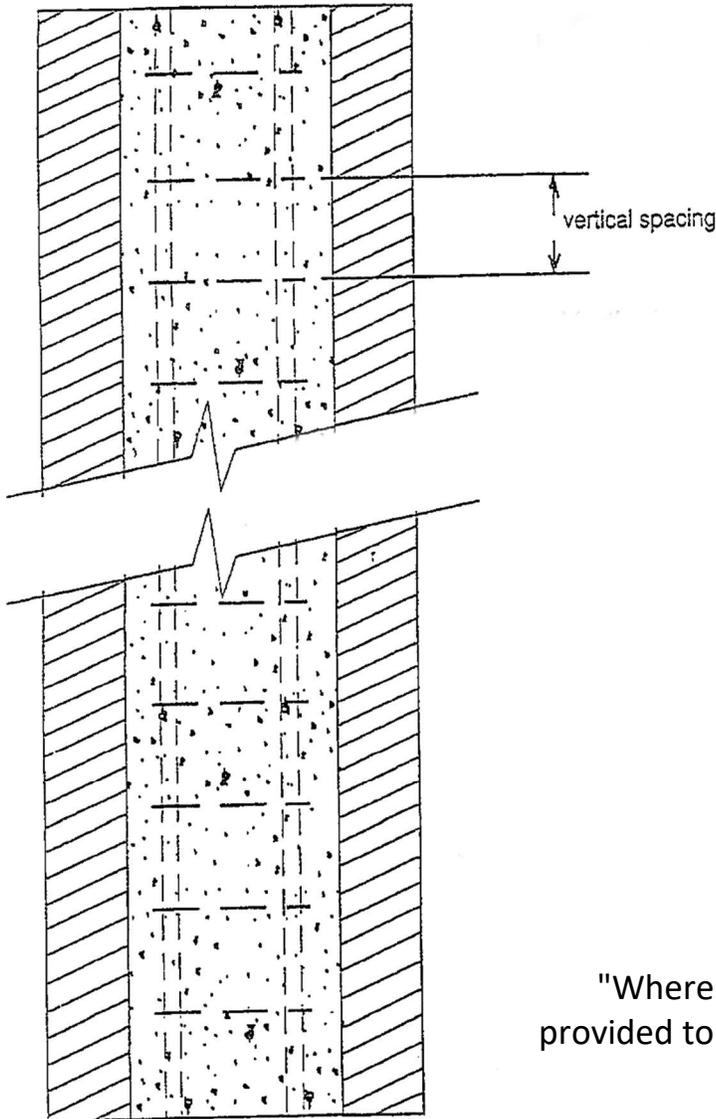

**Column Design:
Page C-57 Ref 5.3.1
Lateral Ties Ref 5.3.1.4**

Vertical spacing of lateral ties shall not exceed 16 longitudinal bar diameters, 48 lateral tie bar or wire diameters, or least cross-sectional dimension of the member (the column).

7th ED Florida Building Code
Section 2107.5
5.4 Pilasters

"Where vertical pilaster reinforcement is NOT provided to resist axial compressive stress, lateral ties are NOT required."